




PBR6401-18
PBR6201-18

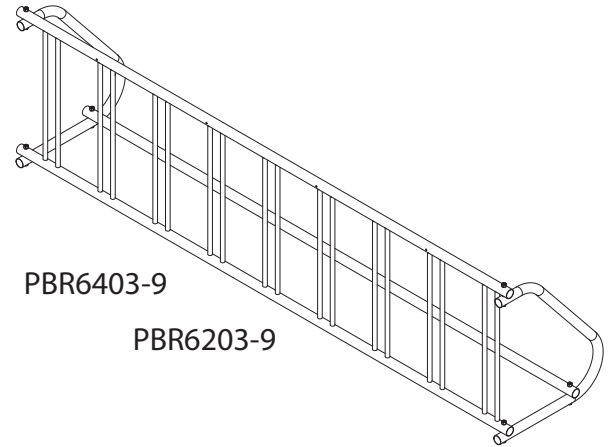

PBR6403-9
PBR6203-9

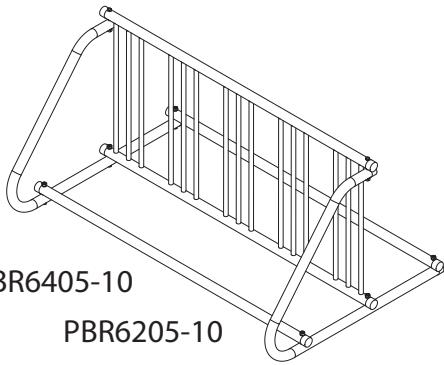

PBR6405-10
PBR6205-10

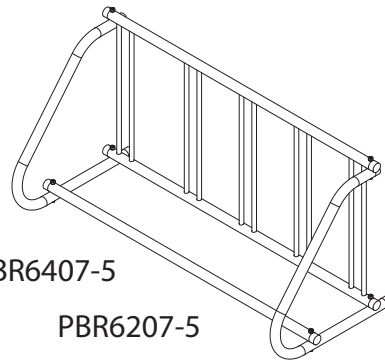

PBR6407-5
PBR6207-5

| PORTABLE™ RACK | | | |
|----------------|---------------------|--------------|---------|
| Model | Description | Dimension | Weight |
| PBR6401-18 | 18 bk. Double-Sided | 111"x38"x31" | 91 lbs. |
| PBR6403-9 | 9 bk. Single-Sided | 111"x26"x31" | 69 lbs. |
| PBR6405-10 | 10 bk. Double-Sided | 62"x38"x31" | 59 lbs. |
| PBR6407-5 | 5 bk. Single-Sided | 62"x26"x31" | 41 lbs. |

| PORTABLE™ RACK | | | |
|----------------|---------------------|--------------|---------|
| Model | Description | Dimension | Weight |
| PBR6201-18 | 18 bk. Double-Sided | 111"x38"x31" | 80 lbs. |
| PBR6203-9 | 9 bk. Single-Sided | 111"x26"x31" | 59 lbs. |
| PBR6205-10 | 10 bk. Double-Sided | 62"x38"x31" | 46 lbs. |
| PBR6207-5 | 5 bk. Single-Sided | 62"x26"x31" | 38 lbs. |

6400 Series

- Verticals are riveted to the frame (easy to replace if they get bent)
- Finished in a Gatorshield galvanization
- 18 gauge verticals (3/4" OD) 14 gauge frame (1.66" OD)

6200 Series

- Verticals are welded to frame (stiffer & stronger grid section)
- Finished w/ Ultra Seal. (Electroplating process that makes the rack 10 times more weather resistant than hot dip galvanized)
- 16 gauge Verticals (3/4" OD) 16 gauge frame (1.66" OD)

All PBR models require assembly. Bolt-together assembly takes about fifteen minutes or less.